

Luminaire

Code 5102-AB-S
 Name Dolt Pontual 6W 456LM 2700K 36°


Measurem.

Code 418/2019
 Name Dolt Pontual 6W 456LM 2700K 36°

Luminaire Flux	456.04 lm	Luminaire Power	6.00 W	Efficacy	76.01 lm/W	Efficiency	100.00%
Sources Flux	456.04 lm	Maximum value	791.64 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire	Length	37 mm	Width	287 mm	Height	1 mm	
Rectangular Luminous Area	Length	37 mm	Width	287 mm	Height	0 mm	
Horizontal Luminous Area	0.010705 m2	Emitting area on Plane 180°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2	Emitting area on Plane 90°	0.002590 m2
Coordinate system	CG	Symmetry Type	Rotosymmetrical	Date	30-05-2019	Maximum Gamma Angle	90
Measurement Distance	0.00	Measurement Flux	456.04 lm	Operator		Rated Voltage	
Temperature	25.00 °C	Rated Current		Humidity	60.00 %	Photocell	
Notes							

Luminaire Sources

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	5102-AB-S	LED 6W 456LM 2700K IRC>90 SDMC<3 NICH	456.04	6.00	1
C.I.E.	97 100 100 100 100	D DIN 5040	A60		
F UTE	1.00 A	B NBN	BZ 1		

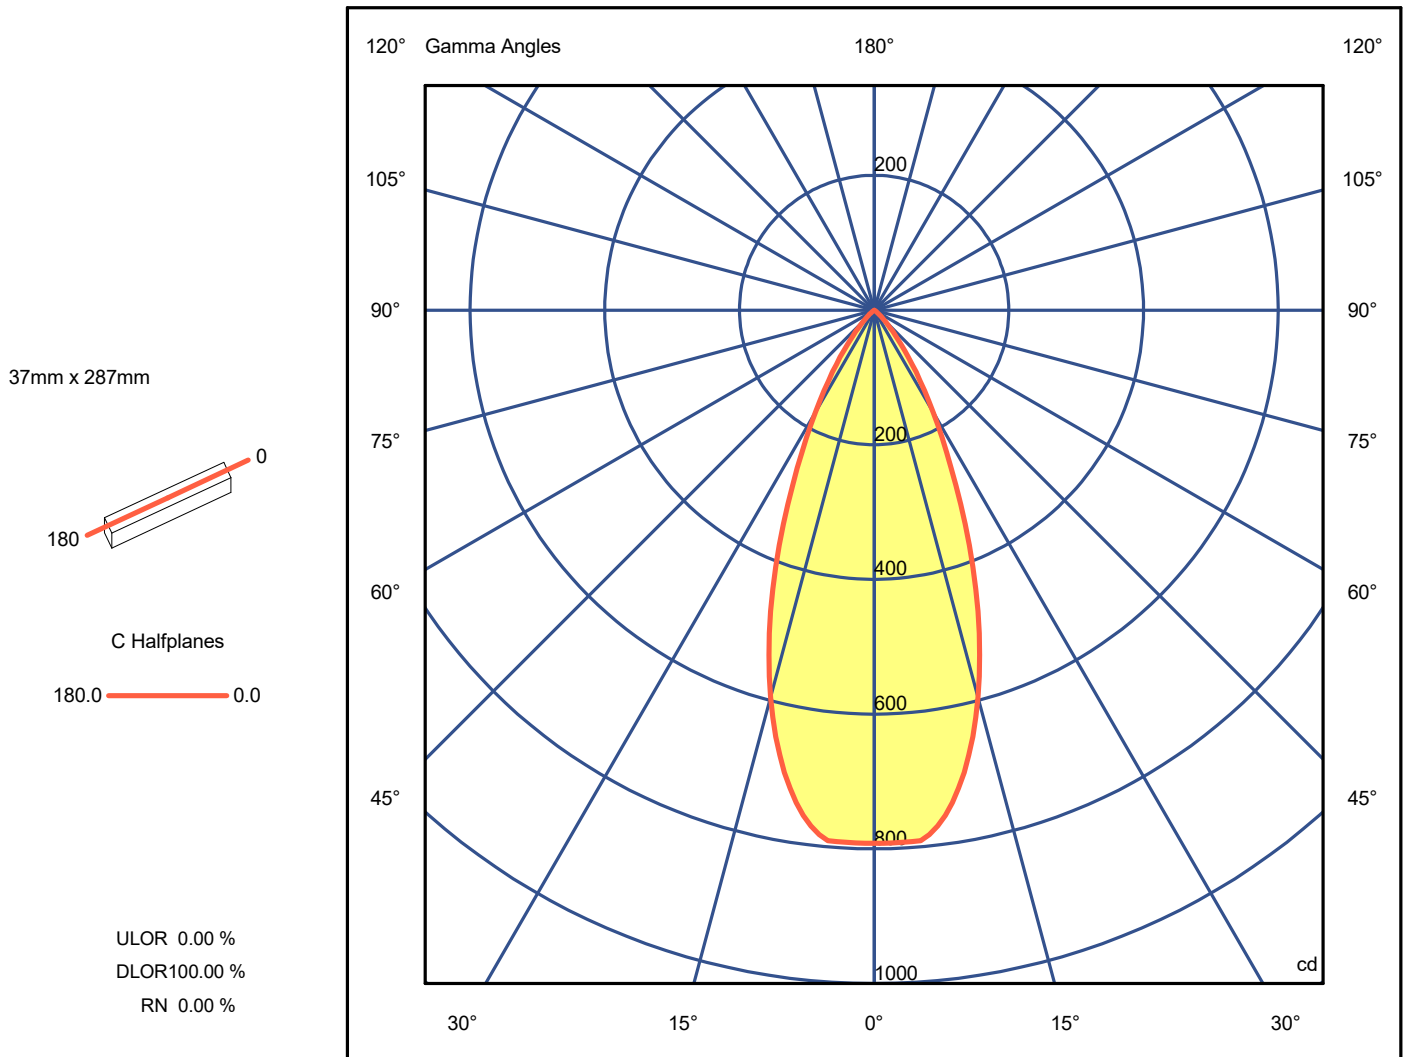

Luminaire

Code 5102-AB-S
 Name Dolt Pontual 6W 456LM 2700K 36°

Measurem.

Code 418/2019
 Name Dolt Pontual 6W 456LM 2700K 36°

Luminaire Flux	456.04 lm	Luminaire Power	6.00 W	Efficacy	76.01 lm/W	Efficiency	100.00%
Sources Flux	456.04 lm	Maximum value	791.64 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical

Luminous Intensity Table cd Table 1/1

C 0.00

G 0.0	791.64
G 5.0	790.82
G 10.0	720.84
G 15.0	594.86
G 20.0	440.90
G 25.0	286.93
G 30.0	174.96
G 35.0	97.98
G 40.0	48.99
G 45.0	21.00
G 50.0	7.00
G 55.0	0.00
G 60.0	0.00
G 65.0	0.00
G 70.0	0.00
G 75.0	0.00
G 80.0	0.00
G 85.0	0.00
G 90.0	0.00