

Luminaire

Code 5200-MA-N
 Name Dolt Pontual Dali 3W 240LM 4000K 48°


Measurement

Code 52/2020
 Name Dolt Pontual Dali 3W 240LM 4000K 48°

Luminaire Flux	240.33 lm	Luminaire Power	3.10 W	Efficacy	77.53 lm/W	Efficiency	100.00%
Sources Flux	240.33 lm	Maximum value	483.58 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire	Length	37 mm	Width	130 mm	Height	1 mm	
Rectangular Luminous Area	Length	37 mm	Width	130 mm	Height	0 mm	
Horizontal Luminous Area	0.004810 m2	Emitting area on Plane 180°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2	Emitting area on Plane 90°	0.001164 m2
Emitting area on Plane 0°	0.000000 m2	Emitting area on Plane 90°	0.000000 m2	Glare area at 76°			
Coordinate system	CG	Symmetry Type	Rotosymmetrical	Maximum Gamma Angle	90	Measurement Flux	240.33 lm
Date	03-02-2020	Measurement Flux					
Measurement Distance	0.00						
Operator		Rated Voltage		Rated Current		Photocell	
Temperature	25.00 °C						
Humidity	60.00 %						
Notes							

Luminaire Sources

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	5200-MA-N	LED 3W 240LM 4000K IRC>90 SDMC<3 NICH	240.33	3.10	1
C.I.E.	100 100 100 100 100	D DIN 5040	A60		
F UTE	-	B NBN	BZ 1		

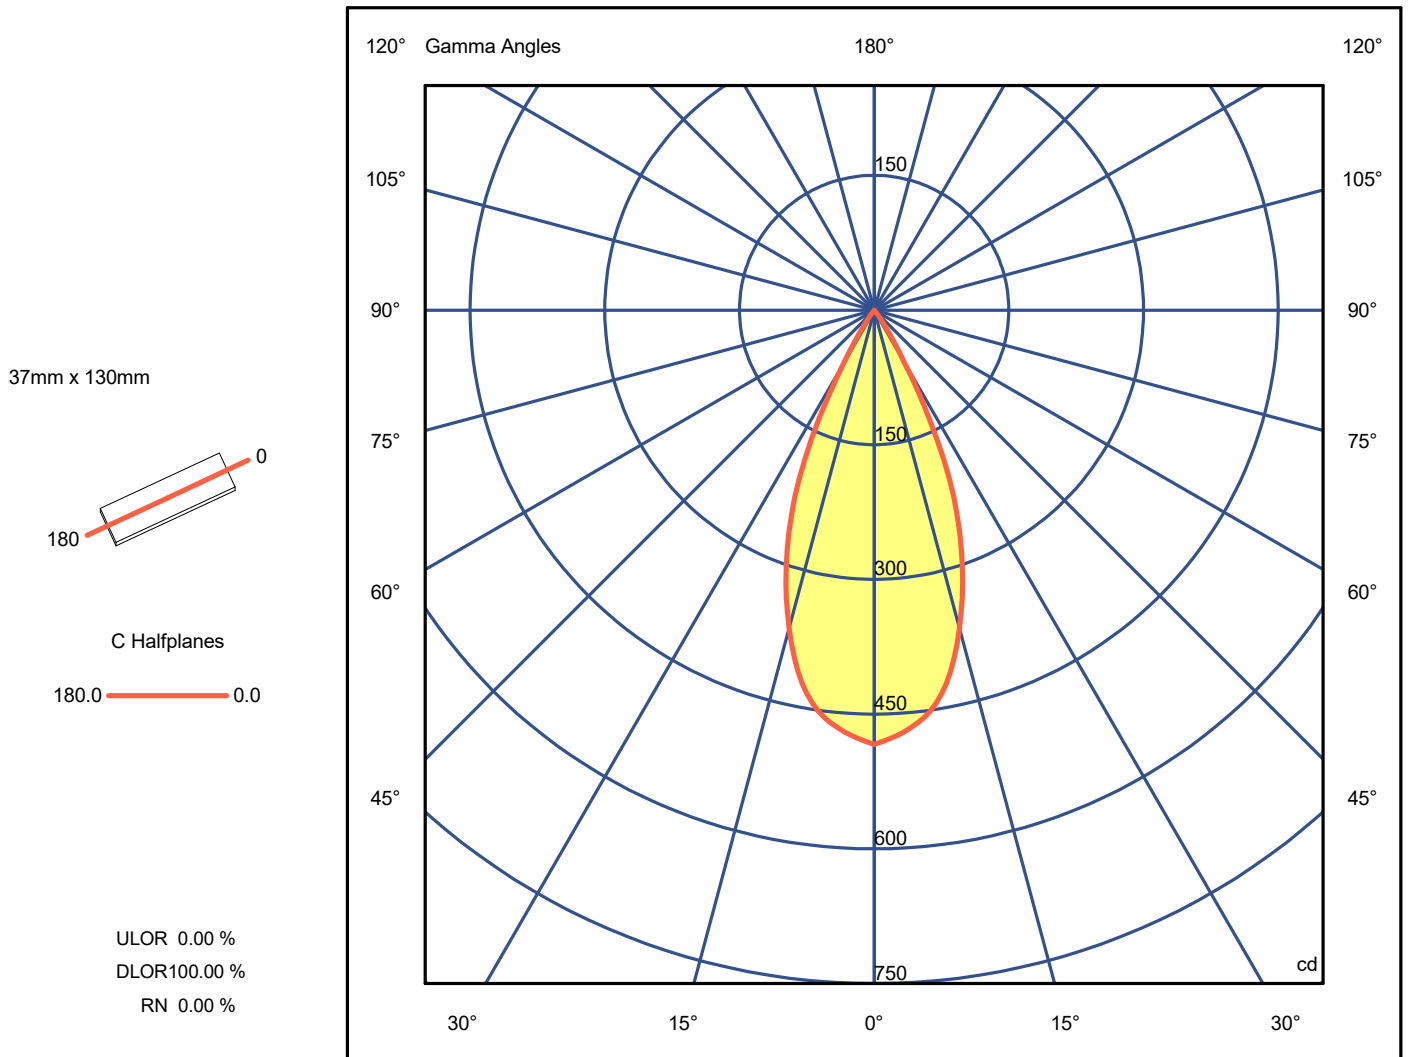

Luminaire

Code 5200-MA-N
 Name Dolt Pontual Dali 3W 240LM 4000K 48°

Measurem.

Code 52/2020
 Name Dolt Pontual Dali 3W 240LM 4000K 48°

Luminaire Flux	240.33 lm	Luminaire Power	3.10 W	Efficacy	77.53 lm/W	Efficiency	100.00%
Sources Flux	240.33 lm	Maximum value	483.58 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical

Luminous Intensity Table cd Table 1/1

C 0.00

G 0.0	483.58
G 5.0	466.90
G 10.0	433.55
G 15.0	366.85
G 20.0	283.48
G 25.0	183.43
G 30.0	66.70
G 35.0	16.68
G 40.0	0.00
G 45.0	0.00
G 50.0	0.00
G 55.0	0.00
G 60.0	0.00
G 65.0	0.00
G 70.0	0.00
G 75.0	0.00
G 80.0	0.00
G 85.0	0.00
G 90.0	0.00