

Luminaire

Code 2583-AB-S
Name PICCO Projetor 7W 568LM 2700K 36°

Measurem.


Code 120/2020
Name PICCO Projetor 7W 568LM 2700K 36°

Luminaire Flux	568.17 lm	Luminaire Power	7.20 W	Efficacy	78.91 lm/W	Efficiency	100.00%
Sources Flux	568.17 lm	Maximum value	986.30 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire	Length	37 mm	Width	84 mm	Height	1 mm	
Rectangular Luminous Area	Length	37 mm	Width	84 mm	Height	0 mm	
Horizontal Luminous Area	0.003108 m2	Emitting area on Plane 180°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2	Emitting area on Plane 90°	0.000752 m2
Coordinate system	CG	Symmetry Type	Rotosymmetrical				
Date	18-04-2020	Maximum Gamma Angle	90				
Measurement Distance	0.00	Measurement Flux	568.17 lm				
Operator		Rated Voltage					
Temperature	25.00 °C	Rated Current					
Humidity	60.00 %	Photocell					
Notes							

Luminaire Sources

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	2583-AB-S	LED 7W 568LM 2700K IRC>90 SDMC<3 NIC	568.17	7.20	1
C.I.E.	97 100 100 100 100	D DIN 5040	A60		
F UTE	1.00 A	B NBN	BZ 1		

37mm x 84mm




C Halfplanes

180.0 — 0.0

ULOR 0.00 %

DLOR 100.00 %

RN 0.00 %

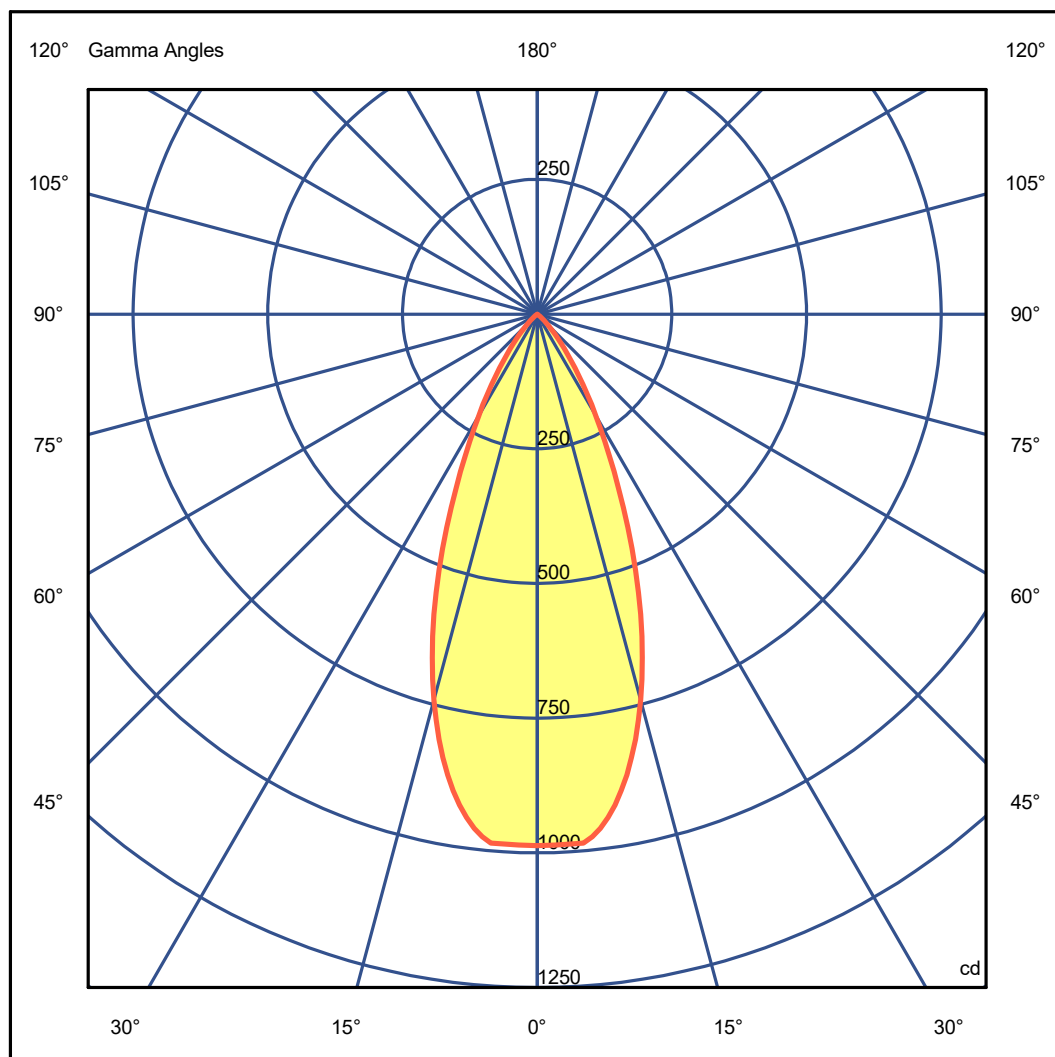

Luminaire

Code 2583-AB-S
Name PICCO Projektor 7W 568LM 2700K 36°

Measurem.

Code 120/2020
Name PICCO Projektor 7W 568LM 2700K 36°

Luminaire Flux	568.17 lm	Luminaire Power	7.20 W	Efficacy	78.91 lm/W	Efficiency	100.00%
Sources Flux	568.17 lm	Maximum value	986.30 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical

Luminous Intensity Table cd Table 1/1

	C	0.00
G 0.0		986.30
G 5.0		985.27
G 10.0		898.08
G 15.0		741.13
G 20.0		549.31
G 25.0		357.49
G 30.0		217.98
G 35.0		122.07
G 40.0		61.03
G 45.0		26.16
G 50.0		8.72
G 55.0		0.00
G 60.0		0.00
G 65.0		0.00
G 70.0		0.00
G 75.0		0.00
G 80.0		0.00
G 85.0		0.00
G 90.0		0.00