

Luminaire

Code 5100-AB-S
 Name Dolt Pontual 3W 228LM 2700K 36°


Measurement

Code 413/2019
 Name Dolt Pontual 3W 228LM 2700K 36°

Luminaire Flux	228.96 lm	Luminaire Power	3.20 W	Efficacy	71.55 lm/W	Efficiency	100.00%
Sources Flux	228.96 lm	Maximum value	397.45 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire	Length	37 mm	Width	114 mm	Height	1 mm	
Rectangular Luminous Area	Length	37 mm	Width	114 mm	Height	0 mm	
Horizontal Luminous Area	0.004218 m2	Emitting area on Plane 180°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2	Emitting area on Plane 90°	0.001020 m2
Coordinate system	CG	Symmetry Type	90	Maximum Gamma Angle	90	Measurement Flux	228.96 lm
Date	29-03-2019	Measurement Distance	0.00	Operator		Temperature	25.00 °C
Humidity	60.00 %	Rated Voltage		Rated Current		Humidity	
Notes		Photocell					

Luminaire Sources

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	5100-AB-S	LED 3W 228LM 2700K IRC>90 SDMC<3 NICH	228.96	3.20	1
C.I.E.	97 100 100 100 100	D DIN 5040	A60		
F UTE	1.00 A	B NBN	BZ 1		

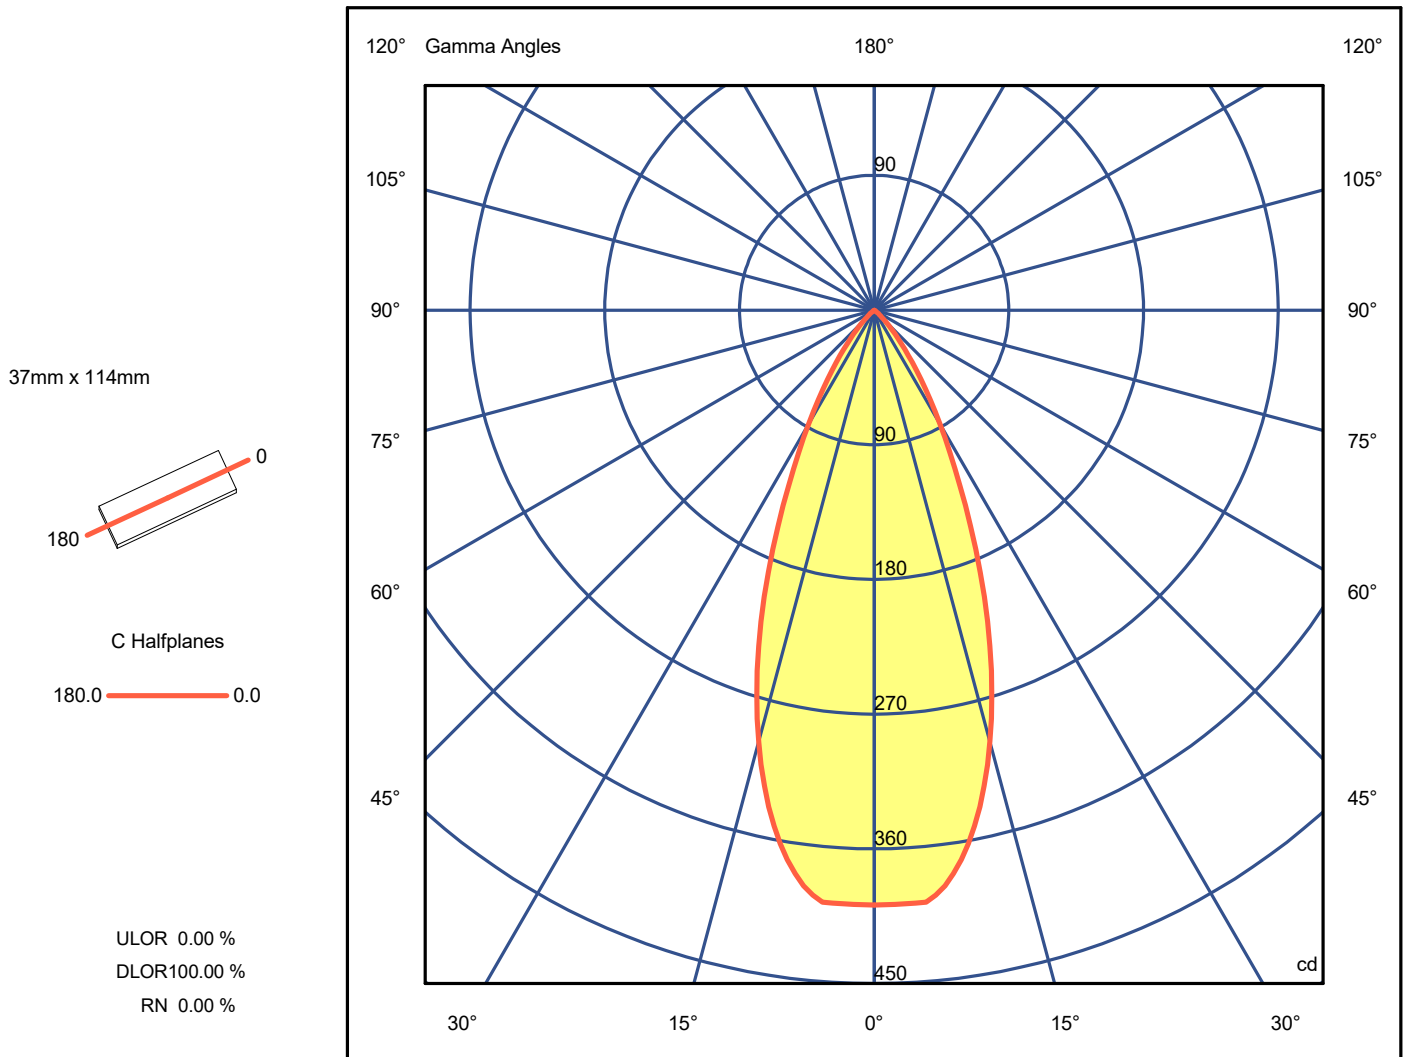

Luminaire

Code 5100-AB-S
 Name Dolt Pontual 3W 228LM 2700K 36°

Measurem.

Code 413/2019
 Name Dolt Pontual 3W 228LM 2700K 36°

Luminaire Flux	228.96 lm	Luminaire Power	3.20 W	Efficacy	71.55 lm/W	Efficiency	100.00%
Sources Flux	228.96 lm	Maximum value	397.45 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical

Luminous Intensity Table cd Table 1/1

C 0.00

G 0.0	397.45
G 5.0	397.04
G 10.0	361.90
G 15.0	298.66
G 20.0	221.36
G 25.0	144.06
G 30.0	87.84
G 35.0	49.19
G 40.0	24.60
G 45.0	10.54
G 50.0	3.51
G 55.0	0.00
G 60.0	0.00
G 65.0	0.00
G 70.0	0.00
G 75.0	0.00
G 80.0	0.00
G 85.0	0.00
G 90.0	0.00