

Luminaire

Code 5200-FE-N
Name Dolt Pontual Dali 3W 240LM 4000K 10°

Measurement


Code 96/2020
Name Dolt Pontual Dali 3W 240LM 4000K 10°

Luminaire Flux	240.18 lm	Luminaire Power	3.10 W	Efficacy	77.48 lm/W	Efficiency	100.00%
Sources Flux	240.18 lm	Maximum value	2150.92 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	37 mm	Width	130 mm	Height	1 mm
Rectangular Luminous Area		Length	37 mm	Width	130 mm	Height	0 mm
Horizontal Luminous Area		0.004810 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001164 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		17-04-2020		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		240.18 lm	
Operator				Rated Voltage			
Temperature		25.00 °C		Rated Current			
Humidity		60.00 %		Photocell			
Notes							

Luminaire Sources

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	5200-FE-N	LED 3W 240LM 4000K IRC>90 SDMC<3 NICHIA	240.18	3.10	1
C.I.E.	100 100 100 100 100	D DIN 5040	A60		
F UTE	--	B NBN	BZ 1		


37mm x 130mm



C Halfplanes

180.0 — 0.0

ULOR 0.00 %
DLOR 100.00 %
RN 0.00 %

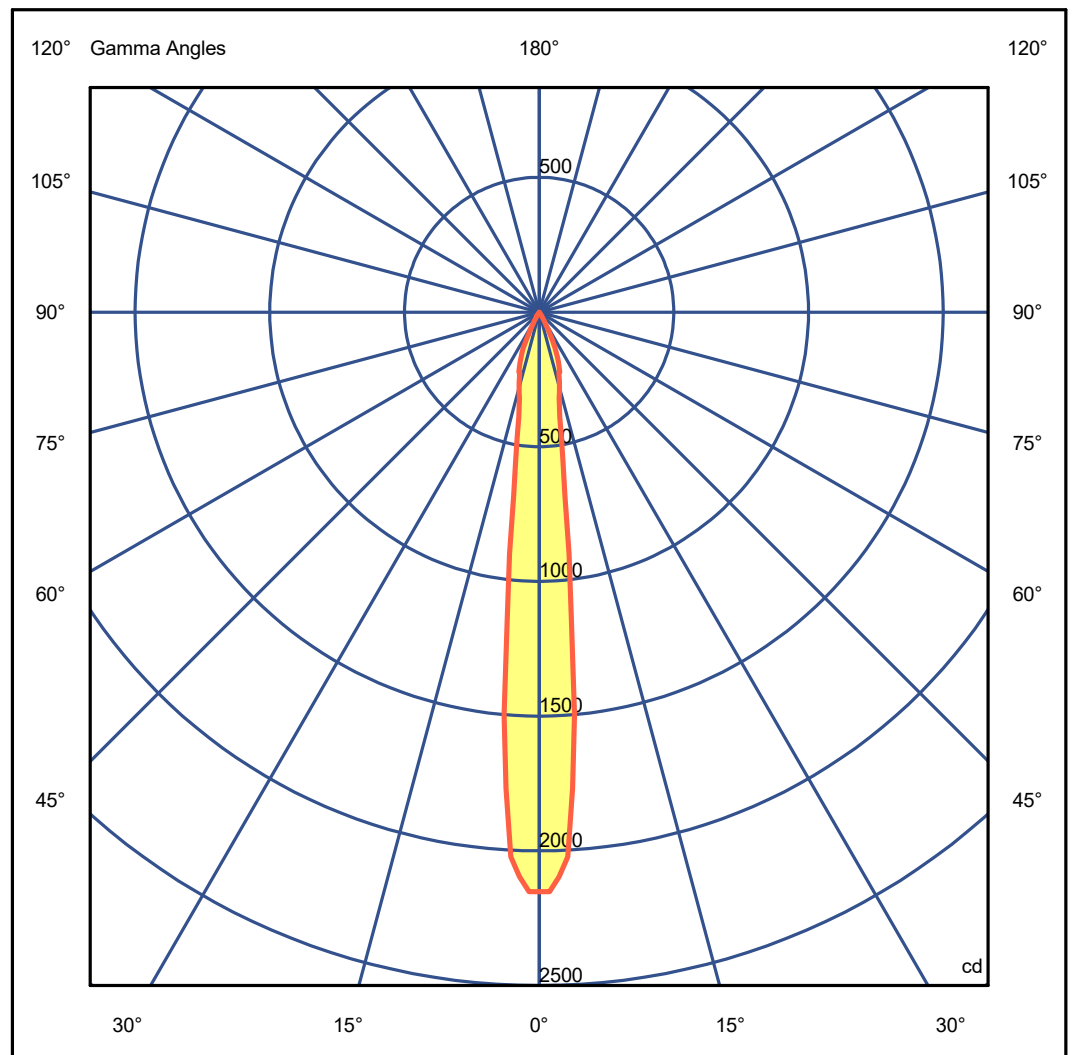

Luminaire

Code 5200-FE-N
Name Dolt Pontual Dali 3W 240LM 4000K 10°

Measurem.

Code 96/2020
Name Dolt Pontual Dali 3W 240LM 4000K 10°

Luminaire Flux	240.18 lm	Luminaire Power	3.10 W	Efficacy	77.48 lm/W	Efficiency	100.00%
Sources Flux	240.18 lm	Maximum value	2150.92 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical

Luminous Intensity Table cd Table 1/1

	C 0.00		C 0.00	
	G 0.0	2150.92	G 46.0	0.00
	G 1.0	2150.92	G 47.0	0.00
	G 2.0	2096.70	G 48.0	0.00
	G 3.0	2024.40	G 49.0	0.00
	G 4.0	1771.35	G 50.0	0.00
	G 5.0	1500.22	G 51.0	0.00
	G 6.0	1138.72	G 52.0	0.00
	G 7.0	903.75	G 53.0	0.00
	G 8.0	686.85	G 54.0	0.00
	G 9.0	560.33	G 55.0	0.00
	G 10.0	469.95	G 56.0	0.00
	G 11.0	397.65	G 57.0	0.00
	G 12.0	361.50	G 58.0	0.00
	G 13.0	325.35	G 59.0	0.00
	G 14.0	307.27	G 60.0	0.00
	G 15.0	289.20	G 61.0	0.00
	G 16.0	271.13	G 62.0	0.00
	G 17.0	253.05	G 63.0	0.00
	G 18.0	234.97	G 64.0	0.00
	G 19.0	234.97	G 65.0	0.00
	G 20.0	216.90	G 66.0	0.00
	G 21.0	198.82	G 67.0	0.00
	G 22.0	180.75	G 68.0	0.00
	G 23.0	162.67	G 69.0	0.00
	G 24.0	144.60	G 70.0	0.00
	G 25.0	108.45	G 71.0	0.00
	G 26.0	90.38	G 72.0	0.00
	G 27.0	72.30	G 73.0	0.00
	G 28.0	54.23	G 74.0	0.00
	G 29.0	36.15	G 75.0	0.00
	G 30.0	18.07	G 76.0	0.00
	G 31.0	18.07	G 77.0	0.00
	G 32.0	18.07	G 78.0	0.00
	G 33.0	18.07	G 79.0	0.00
	G 34.0	18.07	G 80.0	0.00
	G 35.0	0.00	G 81.0	0.00
	G 36.0	0.00	G 82.0	0.00
	G 37.0	0.00	G 83.0	0.00
	G 38.0	0.00	G 84.0	0.00
	G 39.0	0.00	G 85.0	0.00
	G 40.0	0.00	G 86.0	0.00
	G 41.0	0.00	G 87.0	0.00
	G 42.0	0.00	G 88.0	0.00
	G 43.0	0.00	G 89.0	0.00
	G 44.0	0.00	G 90.0	0.00
	G 45.0	0.00		