

Luminaire

Code 5202-FE-S
 Name Dolt Pontual Dali 6W 460LM 2700K 10°

Measurement


Code 105/2020
 Name Dolt Pontual Dali 6W 460LM 2700K 10°

Luminaire Flux	460.09 lm	Luminaire Power	6.30 W	Efficacy	73.03 lm/W	Efficiency	100.00%
Sources Flux	460.09 lm	Maximum value	4120.38 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire	Length	37 mm	Width	215 mm	Height	1 mm	
Rectangular Luminous Area	Length	37 mm	Width	215 mm	Height	0 mm	
Horizontal Luminous Area	0.007955 m2	Emitting area on Plane 180°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2	Emitting area on Plane 90°	0.001924 m2
Coordinate system	CG	Symmetry Type	Rotosymmetrical	Date	17-04-2020	Maximum Gamma Angle	90
Measurement Distance	0.00	Measurement Flux	460.09 lm	Operator		Rated Voltage	
Temperature	25.00 °C	Rated Current		Humidity	60.00 %	Photocell	
Notes							

Luminaire Sources

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	5202-FE-S	LED 6W 460LM 2700K IRC>90 SDMC<3 NICH	460.09	6.30	1
C.I.E.	100 100 100 100 100	D DIN 5040	A60		
F UTE	-	B NBN	BZ 1		


37mm x 215mm



C Halfplanes

180.0 — 0.0

ULOR 0.00 %
 DLOR 100.00 %
 RN 0.00 %

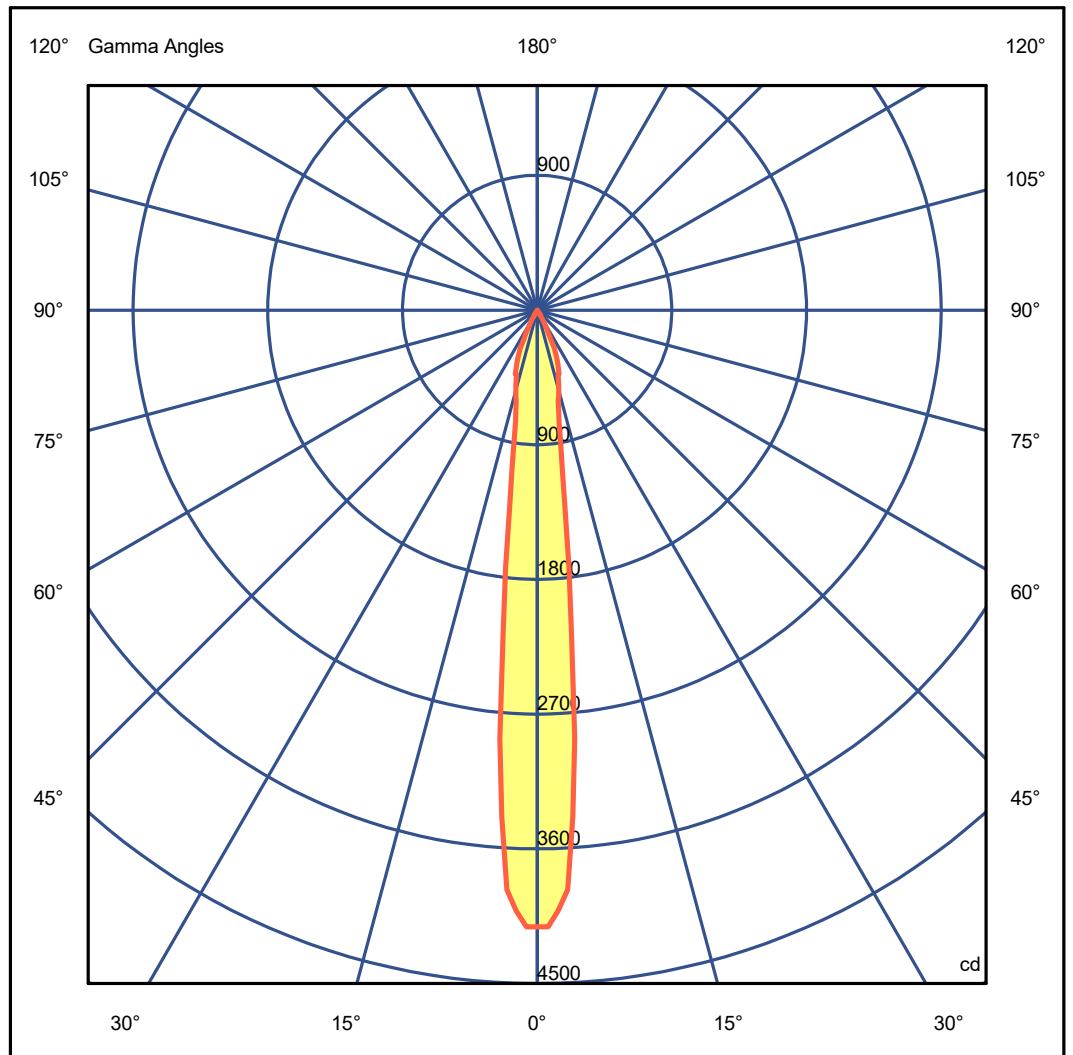

Luminaire

Code 5202-FE-S
 Name Dolt Pontual Dali 6W 460LM 2700K 10°

Measur.

Code 105/2020
 Name Dolt Pontual Dali 6W 460LM 2700K 10°

Luminaire Flux	460.09 lm	Luminaire Power	6.30 W	Efficacy	73.03 lm/W	Efficiency	100.00%
Sources Flux	460.09 lm	Maximum value	4120.38 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical

Luminous Intensity Table cd Table 1/1

	C 0.00	C 0.00
G 0.0	4120.38	G 46.0 0.00
G 1.0	4120.38	G 47.0 0.00
G 2.0	4016.50	G 48.0 0.00
G 3.0	3878.00	G 49.0 0.00
G 4.0	3393.25	G 50.0 0.00
G 5.0	2873.88	G 51.0 0.00
G 6.0	2181.38	G 52.0 0.00
G 7.0	1731.25	G 53.0 0.00
G 8.0	1315.75	G 54.0 0.00
G 9.0	1073.38	G 55.0 0.00
G 10.0	900.25	G 56.0 0.00
G 11.0	761.75	G 57.0 0.00
G 12.0	692.50	G 58.0 0.00
G 13.0	623.25	G 59.0 0.00
G 14.0	588.63	G 60.0 0.00
G 15.0	554.00	G 61.0 0.00
G 16.0	519.38	G 62.0 0.00
G 17.0	484.75	G 63.0 0.00
G 18.0	450.13	G 64.0 0.00
G 19.0	450.13	G 65.0 0.00
G 20.0	415.50	G 66.0 0.00
G 21.0	380.88	G 67.0 0.00
G 22.0	346.25	G 68.0 0.00
G 23.0	311.63	G 69.0 0.00
G 24.0	277.00	G 70.0 0.00
G 25.0	207.75	G 71.0 0.00
G 26.0	173.13	G 72.0 0.00
G 27.0	138.50	G 73.0 0.00
G 28.0	103.88	G 74.0 0.00
G 29.0	69.25	G 75.0 0.00
G 30.0	34.63	G 76.0 0.00
G 31.0	34.63	G 77.0 0.00
G 32.0	34.63	G 78.0 0.00
G 33.0	34.63	G 79.0 0.00
G 34.0	34.63	G 80.0 0.00
G 35.0	0.00	G 81.0 0.00
G 36.0	0.00	G 82.0 0.00
G 37.0	0.00	G 83.0 0.00
G 38.0	0.00	G 84.0 0.00
G 39.0	0.00	G 85.0 0.00
G 40.0	0.00	G 86.0 0.00
G 41.0	0.00	G 87.0 0.00
G 42.0	0.00	G 88.0 0.00
G 43.0	0.00	G 89.0 0.00
G 44.0	0.00	G 90.0 0.00
G 45.0	0.00	