

Luminaire

Code 5202-MA-N
 Name Dolt Pontual Dali 6W 480LM 4000K 48°

Measurement


Code 56/2020
 Name Dolt Pontual Dali 6W 480LM 4000K 48°

Luminaire Flux	480.30 lm	Luminaire Power	6.20 W	Efficacy	77.47 lm/W	Efficiency	100.00%
Sources Flux	480.30 lm	Maximum value	966.42 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire	Length	37 mm	Width	215 mm	Height	1 mm	
Rectangular Luminous Area	Length	37 mm	Width	215 mm	Height	0 mm	
Horizontal Luminous Area	0.007955 m2	Emitting area on Plane 180°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2	Emitting area on Plane 90°	0.001924 m2
Coordinate system	CG	Symmetry Type	Rotosymmetrical	Maximum Gamma Angle	90	Measurement Flux	480.30 lm
Date	03-02-2020	Measurement Distance	0.00	Operator		Temperature	25.00 °C
Humidity	60.00 %	Rated Voltage		Rated Current		Humidity	
Notes		Photocell					

Luminaire Sources

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	5202-MA-N	LED 6W 480LM 4000K IRC>90 SDMC<3 NICH	480.30	6.20	1
C.I.E.	100 100 100 100 100	D DIN 5040	A60		
F UTE	-	B NBN	BZ 1		


37mm x 215mm



C Halfplanes

180.0 — 0.0

ULOR 0.00 %
 DLOR 100.00 %
 RN 0.00 %

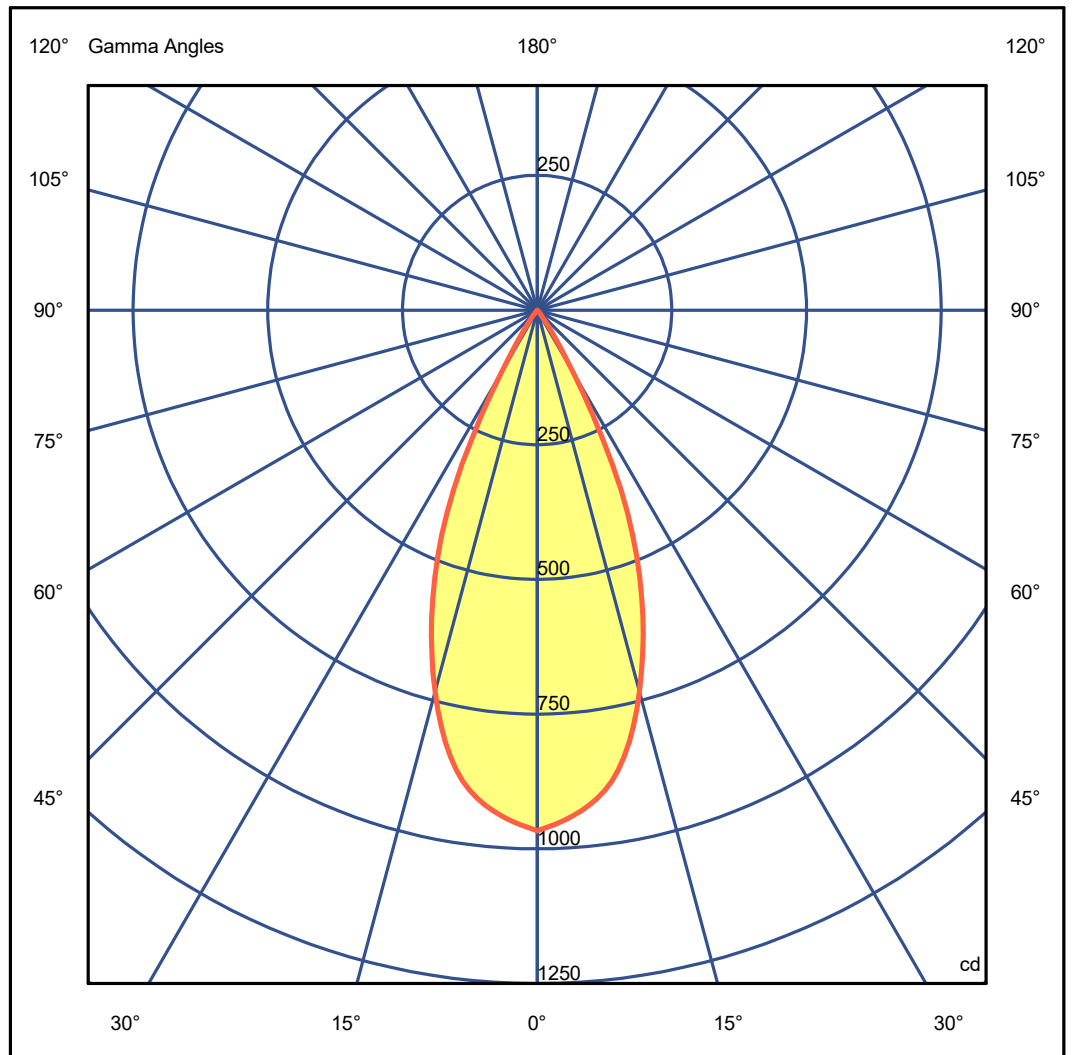

Luminaire

Code 5202-MA-N
 Name Dolt Pontual Dali 6W 480LM 4000K 48°

Measurem.

Code 56/2020
 Name Dolt Pontual Dali 6W 480LM 4000K 48°

Luminaire Flux	480.30 lm	Luminaire Power	6.20 W	Efficacy	77.47 lm/W	Efficiency	100.00%
Sources Flux	480.30 lm	Maximum value	966.42 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical

Luminous Intensity Table cd Table 1/1

C 0.00

G 0.0	966.42
G 5.0	933.10
G 10.0	866.45
G 15.0	733.15
G 20.0	566.52
G 25.0	366.57
G 30.0	133.30
G 35.0	33.33
G 40.0	0.00
G 45.0	0.00
G 50.0	0.00
G 55.0	0.00
G 60.0	0.00
G 65.0	0.00
G 70.0	0.00
G 75.0	0.00
G 80.0	0.00
G 85.0	0.00
G 90.0	0.00