

Luminaire

Code 5203-AB-S
Name Dolt Pontual Dali 14W 1140LM 2700K 36°

Measurement


Code 111/2020
Name Dolt Pontual Dali 14W 1140LM 2700K 36°

Luminaire Flux	1140.50 lm	Luminaire Power	14.30 W	Efficacy	79.76 lm/W	Efficiency	100.00%
Sources Flux	1140.50 lm	Maximum value	3640.80 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire	Length	37 mm	Width	215 mm	Height	1 mm	
Rectangular Luminous Area	Length	37 mm	Width	215 mm	Height	0 mm	
Horizontal Luminous Area	0.007955 m2	Emitting area on Plane 180°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2	Emitting area on Plane 90°	0.001924 m2
Coordinate system	CG	Symmetry Type	Rotosymmetrical	Maximum Gamma Angle	90	Measurement Flux	1140.50 lm
Date	17-04-2020	Rated Voltage		Rated Current		Photocell	
Measurement Distance	0.00	Operator		Temperature	25.00 °C	Humidity	60.00 %
Notes							

Luminaire Sources

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	5203-AB-S	LED 14W 1140LM 2700K IRC>90 SDMC<3 NICHIA	1140.50	14.30	1
C.I.E.	100 100 100 100 100	D DIN 5040	A60		
F UTE	--	B NBN	BZ 1		

37mm x 215mm




C Halfplanes

180.0 — 0.0

ULOR 0.00 %

DLOR 100.00 %

RN 0.00 %

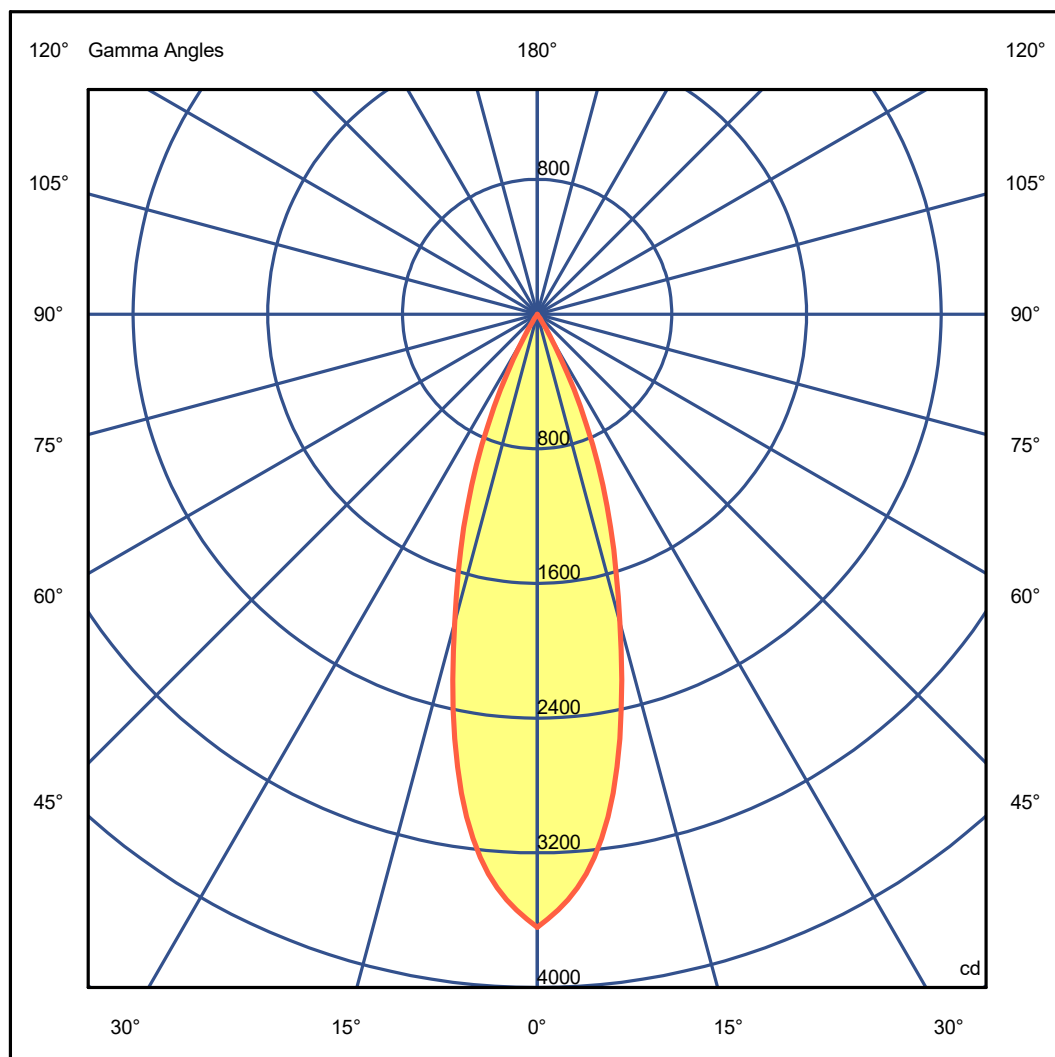

Luminaire

Code 5203-AB-S
Name Dolt Pontual Dali 14W 1140LM 2700K 36°

Measurem.

Code 111/2020
Name Dolt Pontual Dali 14W 1140LM 2700K 36°

Luminaire Flux	1140.50 lm	Luminaire Power	14.30 W	Efficacy	79.76 lm/W	Efficiency	100.00%
Sources Flux	1140.50 lm	Maximum value	3640.80 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical

Luminous Intensity Table cd Table 1/1

	C	0.00
G 0.0		3640.80
G 5.0		3337.40
G 10.0		2730.60
G 15.0		1896.25
G 20.0		1213.60
G 25.0		606.80
G 30.0		151.70
G 35.0		0.00
G 40.0		0.00
G 45.0		0.00
G 50.0		0.00
G 55.0		0.00
G 60.0		0.00
G 65.0		0.00
G 70.0		0.00
G 75.0		0.00
G 80.0		0.00
G 85.0		0.00
G 90.0		0.00