

Luminaire

Code 5210-S
Name Dolt Difusa Dali 5W 350LM 2700K 120°

Measurem.


Code 74/2020
Name Dolt Difusa Dali 5W 350LM 2700K 120°

Luminaire Flux	350.41 lm	Luminaire Power	5.20 W	Efficacy	67.39 lm/W	Efficiency	100.00%
Sources Flux	350.41 lm	Maximum value	146.16 cd	Position	C=0.00 G=0.00	CG Rotosymmetrical	
Rectangular Luminaire		Length	37 mm	Width	283 mm	Height	1 mm
Rectangular Luminous Area		Length	37 mm	Width	283 mm	Height	0 mm
Horizontal Luminous Area		0.010471 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.002533 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		06-03-2020		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		350.41 lm	
Operator				Rated Voltage			
Temperature		25.00 °C		Rated Current			
Humidity		60.00 %		Photocell			
Notes							

Luminaire Sources

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	5210-S	LED 5W 350LM 2700K IRC>90 SDMC<3 ARR35041	350.41	5.20	1
C.I.E.	53 84 98 100 100	D DIN 5040	A40		
F UTE	1.00 D	B NBN	BZ 4		

37mm x 283mm




C Halfplanes

180.0 — 0.0

ULOR 0.00 %

DLOR 100.00 %

RN 0.00 %

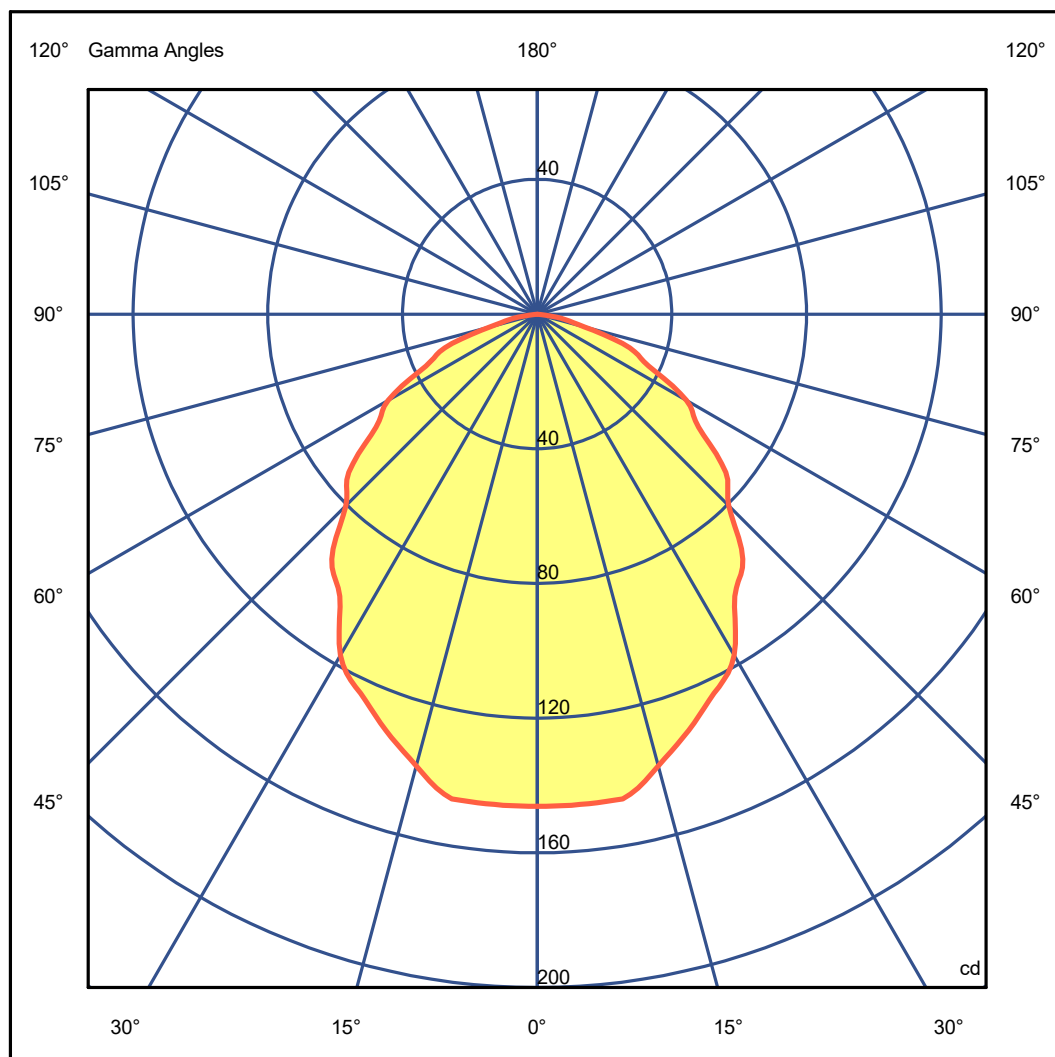

Luminaire

Code 5210-S
Name Dolt Difusa Dali 5W 350LM 2700K 120°

Measurem.

Code 74/2020
Name Dolt Difusa Dali 5W 350LM 2700K 120°

Luminaire Flux	350.41 lm	Luminaire Power	5.20 W	Efficacy	67.39 lm/W	Efficiency	100.00%
Sources Flux	350.41 lm	Maximum value	146.16 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical

Luminous Intensity Table cd Table 1/1

	C	0.00
G 0.0		146.16
G 5.0		146.16
G 10.0		146.16
G 15.0		138.85
G 20.0		131.54
G 25.0		124.24
G 30.0		116.93
G 35.0		102.31
G 40.0		95.00
G 45.0		80.39
G 50.0		73.08
G 55.0		58.46
G 60.0		51.16
G 65.0		36.54
G 70.0		29.23
G 75.0		14.62
G 80.0		7.31
G 85.0		0.00
G 90.0		0.00