

Luminaire

Code 5213-S
Name Dolt Difusa Dali 22W 1680LM 2700K 120°

Measurem.


Code 79/2020
Name Dolt Difusa Dali 22W 1680LM 2700K 120°

Luminaire Flux	1680.45 lm	Luminaire Power	22.30 W	Efficacy	75.36 lm/W	Efficiency	100.00%
Sources Flux	1680.45 lm	Maximum value	719.37 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	37 mm	Width	564 mm	Height	1 mm
Rectangular Luminous Area		Length	37 mm	Width	564 mm	Height	0 mm
Horizontal Luminous Area		0.020868 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.005048 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		06-03-2020		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		1680.45 lm	
Operator				Rated Voltage			
Temperature		25.00 °C		Rated Current			
Humidity		60.00 %		Photocell			
Notes							

Luminaire Sources

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
	5213-S	LED 22W 1680LM 2700K IRC>90 SDMC<3 A63045	1680.45	22.30	1
C.I.E.	53 84 98 100 100	D DIN 5040	A40		
F UTE	1.00 D	B NBN	BZ 4		

37mm x 564mm




C Halfplanes

180.0 — 0.0

ULOR 0.00 %

DLOR 100.00 %

RN 0.00 %

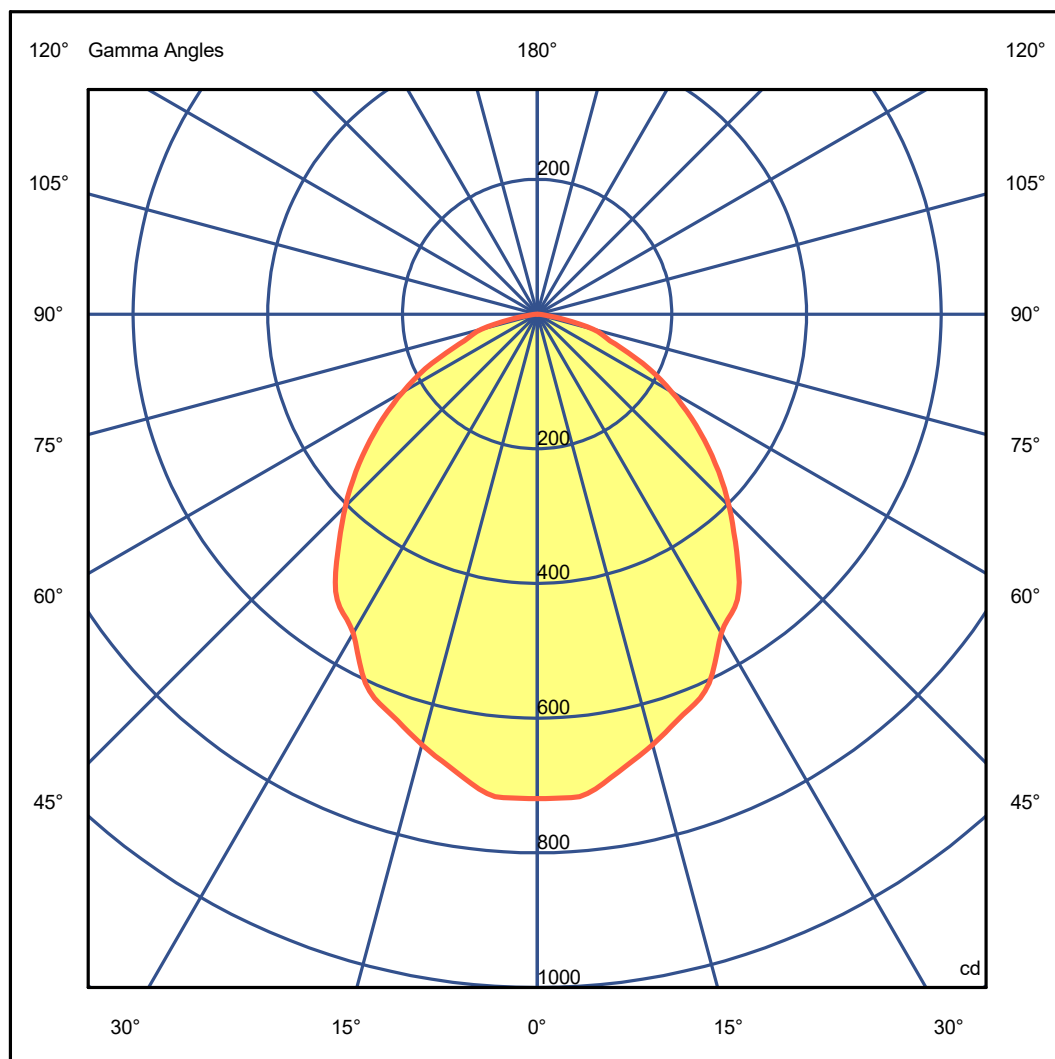

Luminaire

Code 5213-S
Name Dolt Difusa Dali 22W 1680LM 2700K 120°

Measurem.

Code 79/2020
Name Dolt Difusa Dali 22W 1680LM 2700K 120°

Luminaire Flux	1680.45 lm	Luminaire Power	22.30 W	Efficacy	75.36 lm/W	Efficiency	100.00%
Sources Flux	1680.45 lm	Maximum value	719.37 cd	Position	C=0.00 G=0.00	CG	Rotosymmetrical

Luminous Intensity Table cd Table 1/1

	C	0.00
G 0.0		719.37
G 5.0		719.37
G 10.0		690.60
G 15.0		661.82
G 20.0		633.05
G 25.0		604.27
G 30.0		546.72
G 35.0		517.95
G 40.0		460.40
G 45.0		402.85
G 50.0		345.30
G 55.0		287.75
G 60.0		230.20
G 65.0		172.65
G 70.0		115.10
G 75.0		86.32
G 80.0		28.77
G 85.0		0.00
G 90.0		0.00